

# FELT

BUZZIFELT  
BUZZIFELT PRINTED  
SLICED BUZZIFELT

## BuzziFelt




FE-Anthracite 68

**Composition** 100% Recycled PE.T. Felt, latex backing  
**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>  
**Width** 170 cm | 66.93"  
**Thickness** 6 mm | 0.236"  
**Abrasion resistance** >7.000 Martindale  
**Flammability** EU: EN 13501.1 + A1/2009 Class B-s1,d0  
 USA: ASTM E84 Class A certified  
**Fastness to light** EU: 6-7 | USA 5 Vacuum clean regularly. Don't wash. Don't remove the BuzziFelt from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.



## Sliced BuzziFelt




Anthracite | Anthracite

**Composition** 100% Recycled PE.T. Felt  
 Vacuum clean regularly. Don't wash. Don't remove the Sliced BuzziFelt from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.



# FELT


BUZZIFELT  
SLICED BUZZIFELT  
BUZZIFELT PRINTED



FE-EcoBrown 58




FE-Mokka 74



FE-StoneGrey 67




FE-OffWhite 63



EcoBrown | EcoBrown




Mokka | Mokka




StoneGrey | StoneGrey



OffWhite | OffWhite




FE-Jeans 75




FE-LightBlue 60




FE-Lime 64




FE-Red 59



Jeans | Jeans



LightBlue | LightBlue




Lime | Lime




Red | Red



FE-Pink 65




FE-Orange 66




FE-Curry 61



Pink | Pink



Orange | Orange



Curry | Curry

**Note** color deviation may occur.  
 Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

**Note** color deviation may occur.  
 Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

# FELT

BUZZIFELT  
SLICED BUZZIFELT  
BUZZIFELT PRINTED

## Bicolor



OffWhite | Anthracite



OffWhite | EcoBrown




OffWhite | Jeans



Offwhite | StoneGrey



OffWhite | Mokka



Offwhite | LightBlue



OffWhite | Lime




OffWhite | Red



OffWhite | Pink



OffWhite | Orange



OffWhite | Curry

## Multicolor



Zebra

Anthracite  
StoneGrey  
OffWhite




Sigma

Anthracite  
StoneGrey  
OffWhite  
White  
Orange  
EcoBrown




Jane

Anthracite  
StoneGrey  
OffWhite  
White  
Red  
EcoBrown



Tukan

LightBlue  
Lime  
StoneGrey  
Red  
EcoBrown  
Orange  
Pink  
Anthracite  
OffWhite  
Curry




Savannah

LightBlue  
EcoBrown  
Orange




Colibri

LightBlue  
StoneGrey  
Pink



Toendra

LightBlue  
StoneGrey  
Lime



Grass

LightBlue  
OffWhite  
Lime

# FELT

BUZZIFELT  
SLICED BUZZIFELT  
BUZZIFELT PRINTED

**Note** color deviation may occur.  
Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

**Note** color deviation may occur.  
Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

# FELT

BUZZIFELT  
SLICED BUZZIFELT  
BUZZIFELT PRINTED

## BuzziFelt Printed



Jungle

**Composition** 100% Recycled PE.T. Felt, latex backing  
**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>  
**Width** 170 cm | 66.93"  
**Thickness** 6 mm | 0.236"  
**Abrasion resistance** >7.000 Martindale  
**Flammability** EU: EN 13501.1 + A1/2009 Class B-s1,d0  
 USA: ASTM E84 Class A certified  
**Fastness to light** EU: 6-7 | USA 5  
**Maintenance** Vacuum clean regularly. Don't wash. Don't remove the BuzziFelt from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.



Camo Amazon



Camo Desert




Camo Snow



Camo Taiga




Concrete




Green 1




Green 2



Marble Absynth




Marble Emperador

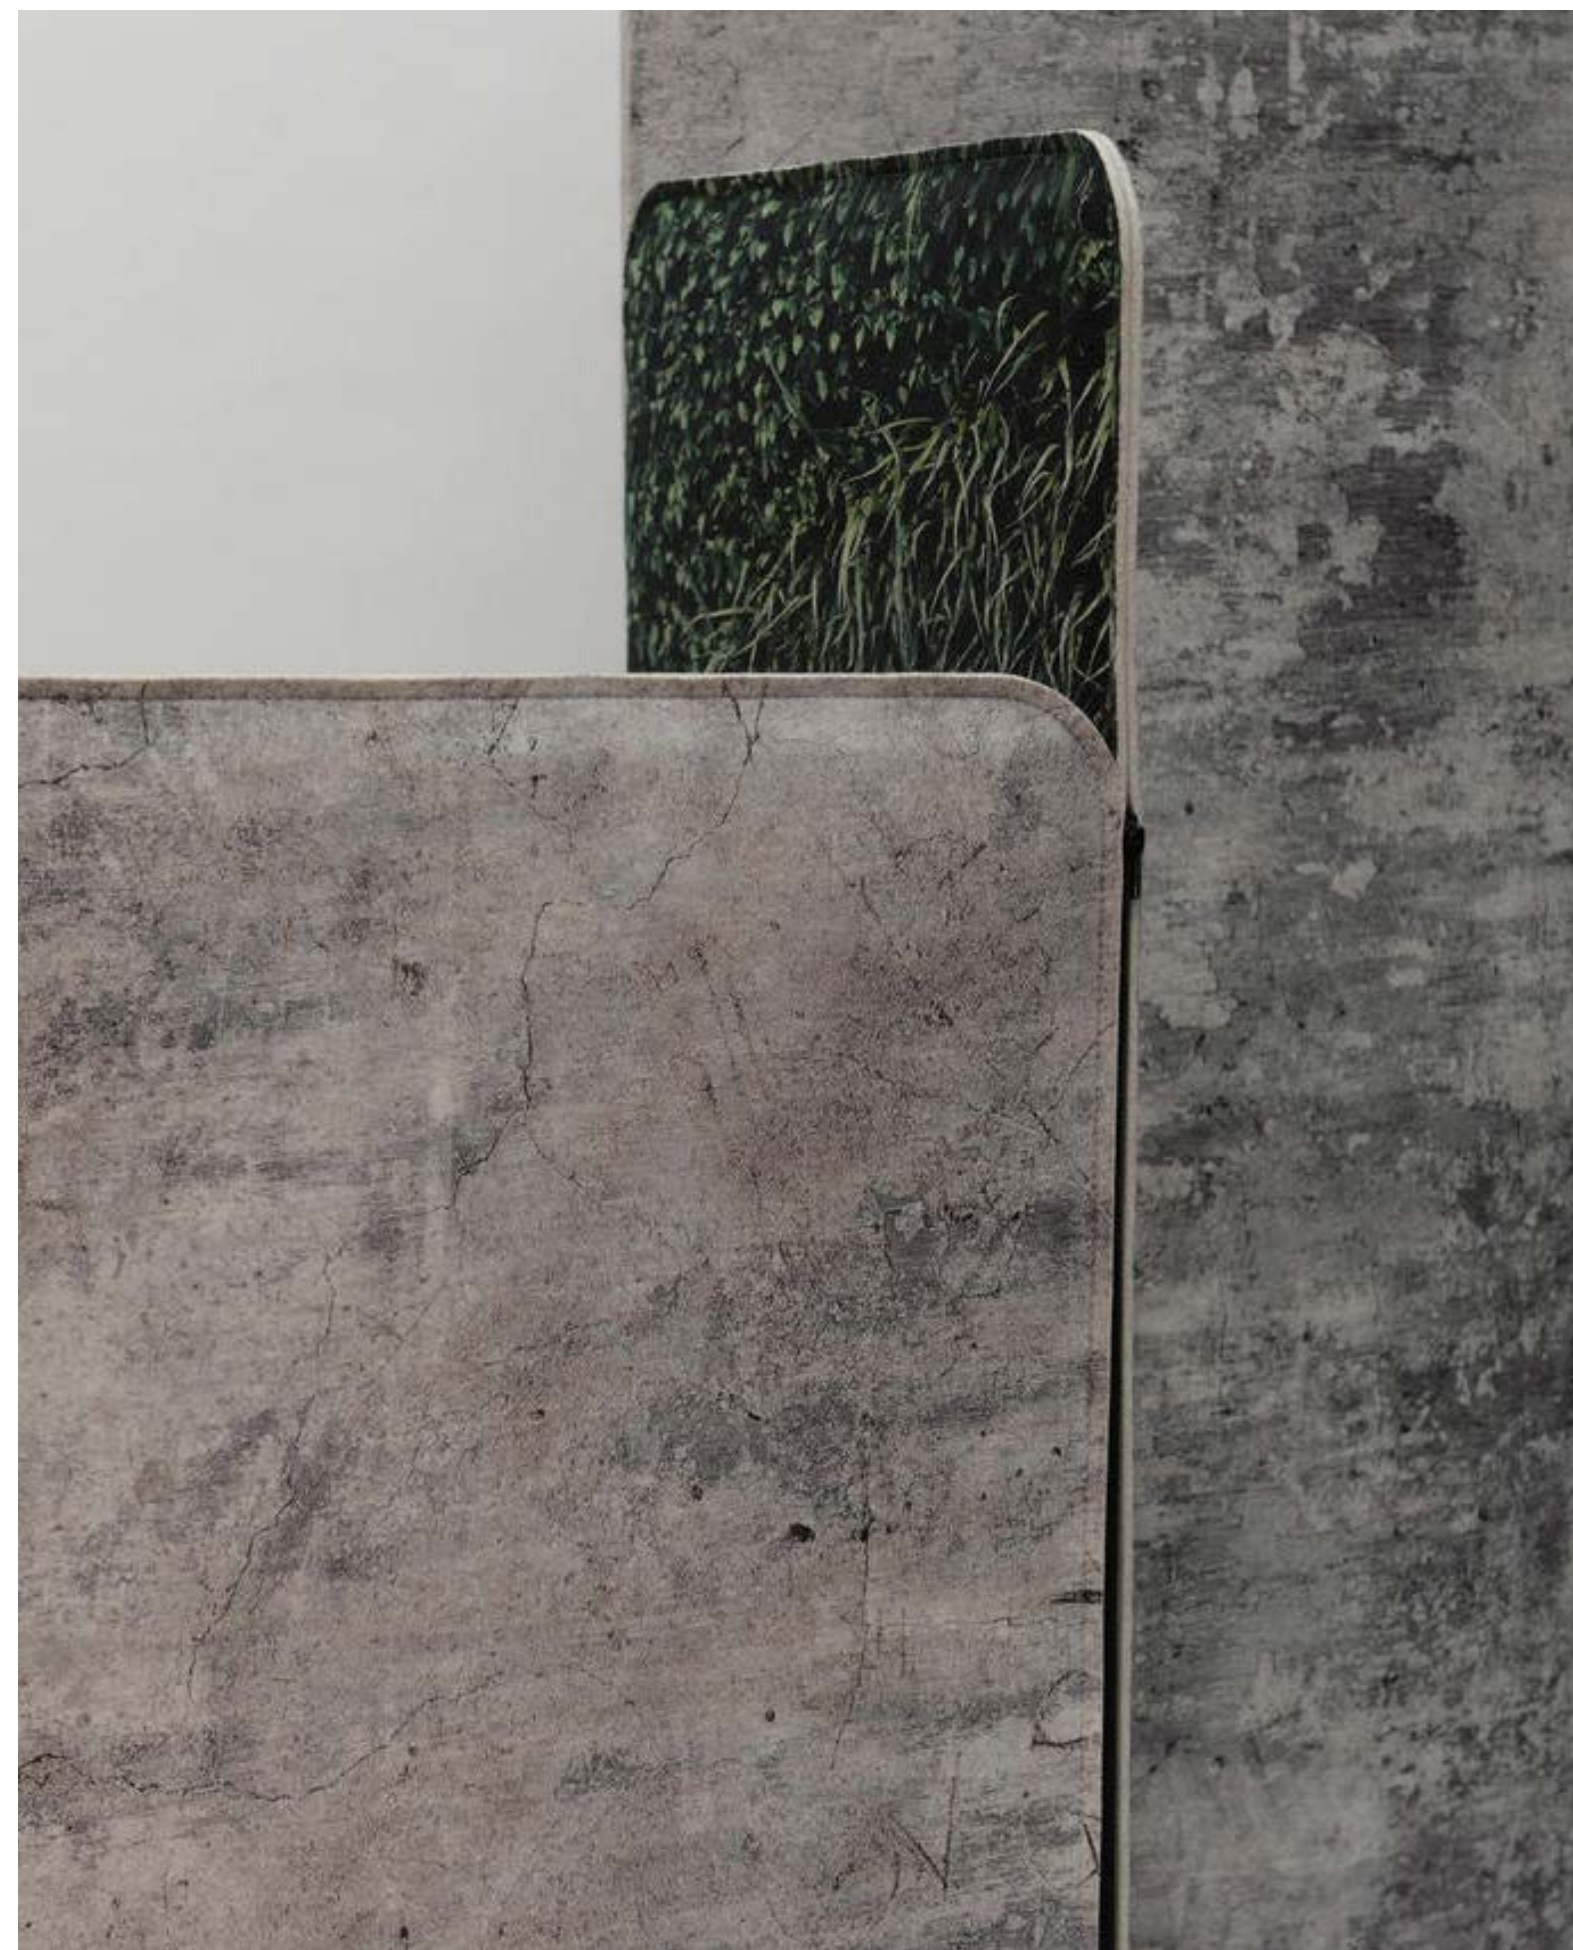

**Note** color deviation may occur.  
Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)



## Fabric



FA-LightGrey  
1000

**Composition** 75% Recycled Wool, 25% Recycled Polyacryl,  
**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>  
**Width** 148 cm | 58.27"  
**Thickness** 0,8 mm | 0.031 inch  
**Abrasion resistance** 40.000 Martindale, 50.000 Wyzenbeek  
**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)  
 EN 1021.2/2006 | BS EN 1021.2/2006 (match)  
 USA: CAL TB 117 | ASTM E84 CLASS A  
**Fastness to light** EU: 4 | USA: 4  
**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5  
**Fastness to crocking** USA: Wet 5 | Dry 5  
**Maintenance** Vacuum clean regularly. Don't wash. Don't remove the Fabric from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.



FA-Zwart 1003	FA-MidGrey 1001	FA-DarkBrown 18	FA-Taupe 1008	FA-Rust 29	FA-Shitake 124	FA-Dolphin 180	FA-Kiezel 7
FA-Silver 57	FA-Beige 1037	FA-Naturel 1	FA-Ivory 101	FA-Nude 70	FA-Violet 72	FA-Purple 78	FA-Aubergine 74
FA-Prune 76	FA-Pink 73	FA-Fuchsia 77	FA-Lila 39	FA-Navy 1007	FA-Blue 45	FA-Indigo 90	FA-Petrol 56
FA-LightBlue 41	FA-Aqua 143	FA-OceanBlue 147	FA-Electric 16	FA-Azure 144	FA-Mint 50	FA-Bottle 61	FA-Olive 53
FA-Army 14	FA-Pistache 52	FA-Grass 59	FA-Jade 42	FA-Red 2011	FA-Fire 139	FA-Mandarin 129	FA-Orange 2012
FA-Autumn 33	FA-Camel 56	FA-Mustard 63	FA-Yellow 24				

## CAT A


FABRIC  
 TREVIRA CS+  
 TREVIRA CS  
 REVIVE 1

**Note** color deviation may occur.  
 Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

# CAT A


FABRIC  
TREVIRA CS+  
TREVIRA CS  
REVIVE 1

## Trevira CS+ | Trevira CS



TRCS+ Hazy Mocca 9302


**Composition** 100% Polyester, Trevira CS  
**Weight** 420 g/m<sup>2</sup> | 12.39 oz/yd<sup>2</sup>  
**Width** Trevira CS+ 150 cm | 59.06" - Trevira CS 140 cm | 55.12"  
**Abrasion resistance** 100.000 Martindale, 90.000 Wyzenbeek  
**Flammability** EU: BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard M1 | B1 | C1 | EN 1021/1-2 | IMO Res. A652 (16) USA: CAL TB 117\*  
**Fastness to light** EU: 6 | USA: 5  
**Fastness to rubbing** EU: Wet 4-5 | Dry 4-5  
**Fastness to crocking** USA: Wet 5 | Dry 5  
**Match** Weight ±5% | Width ±2%  
**Maintenance** Vacuum clean regularly. Don't remove the Trevira CS+ | Trevira CS from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.

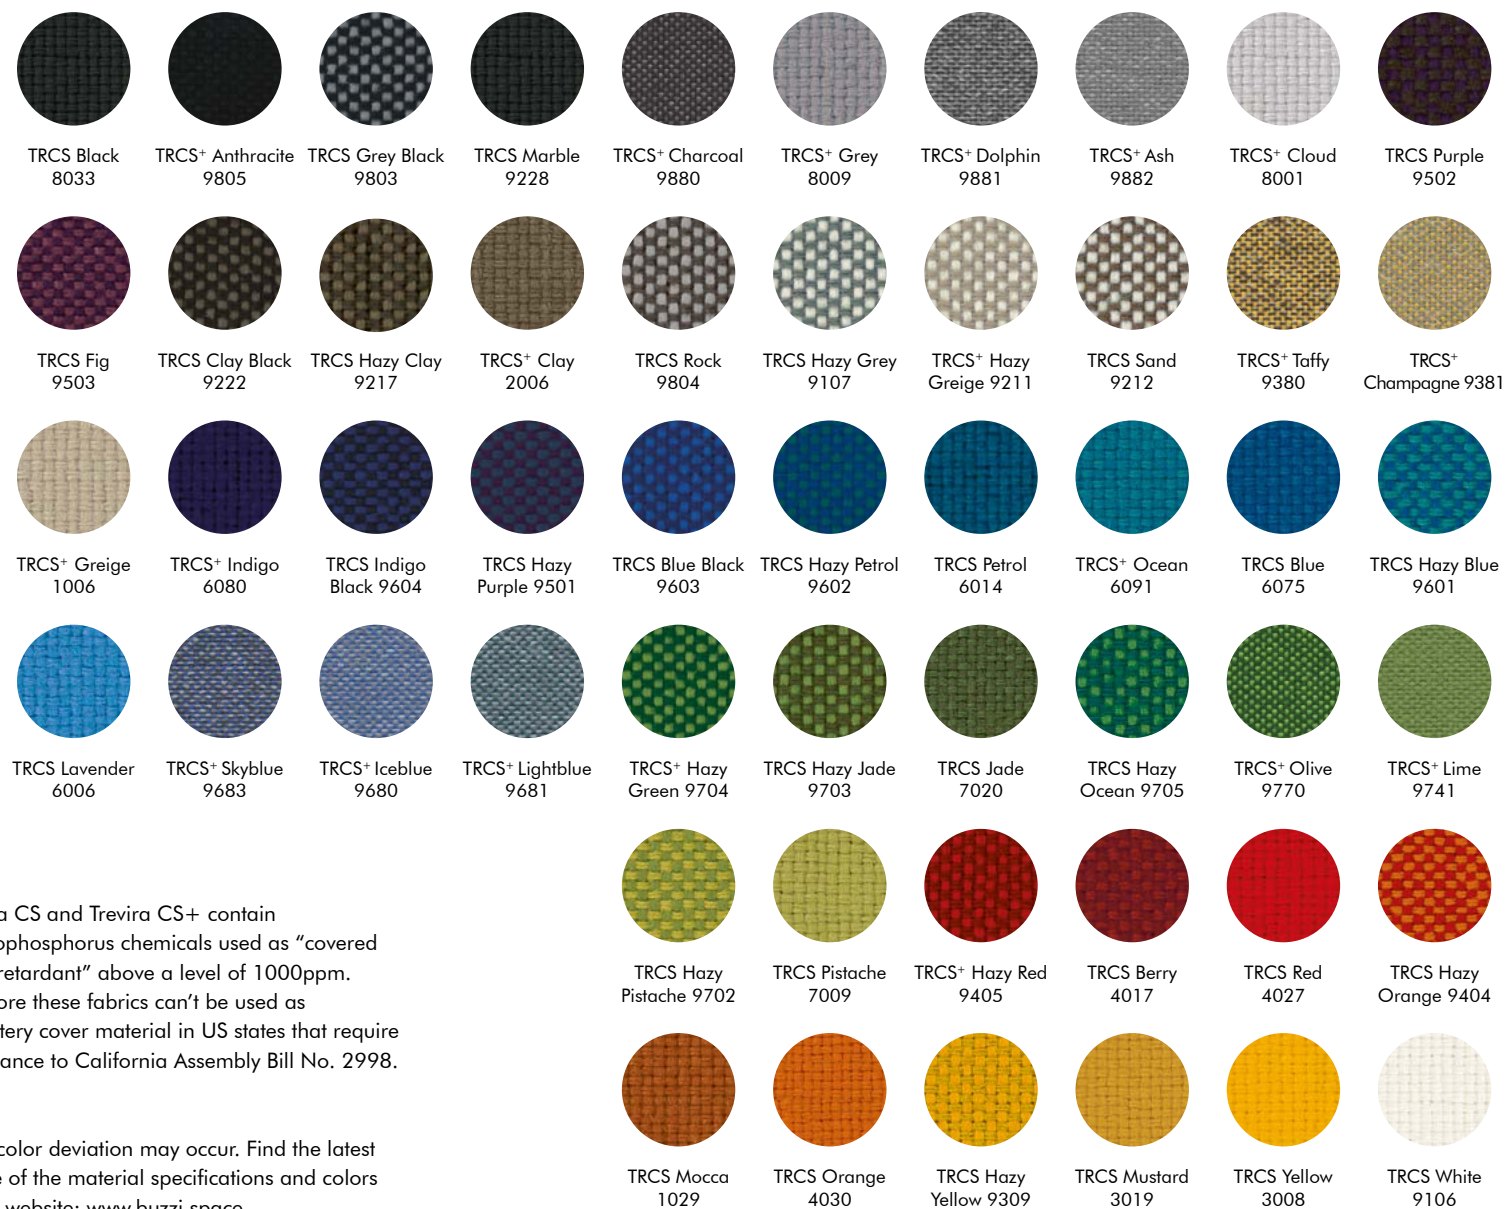

\*Trevira CS and Trevira CS+ contain organophosphorus chemicals used as "covered flame retardant" above a level of 1000ppm. Therefore these fabrics can't be used as upholstery cover material in US states that require compliance to California Assembly Bill No. 2998.


**Note** color deviation may occur. Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

## Revive 1



Revive 1 144

**Composition** 100% recycled polyester FR  
**Weight** 430 g/lin.m  
**Width** 140 cm | 55.11"  
**Abrasion resistance** 60.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1 UNI 9175 11M | US Cal. Tech. Bull. 117\* IMO A.652 (16)  
**Fastness to light** Note 5-7, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 5, wet 4-5  
**Pilling** Note 4-5, EN ISO 12945  
**Maintenance** Vacuuming and dry cleaning. Washable at max. 60°C. Drip drying.

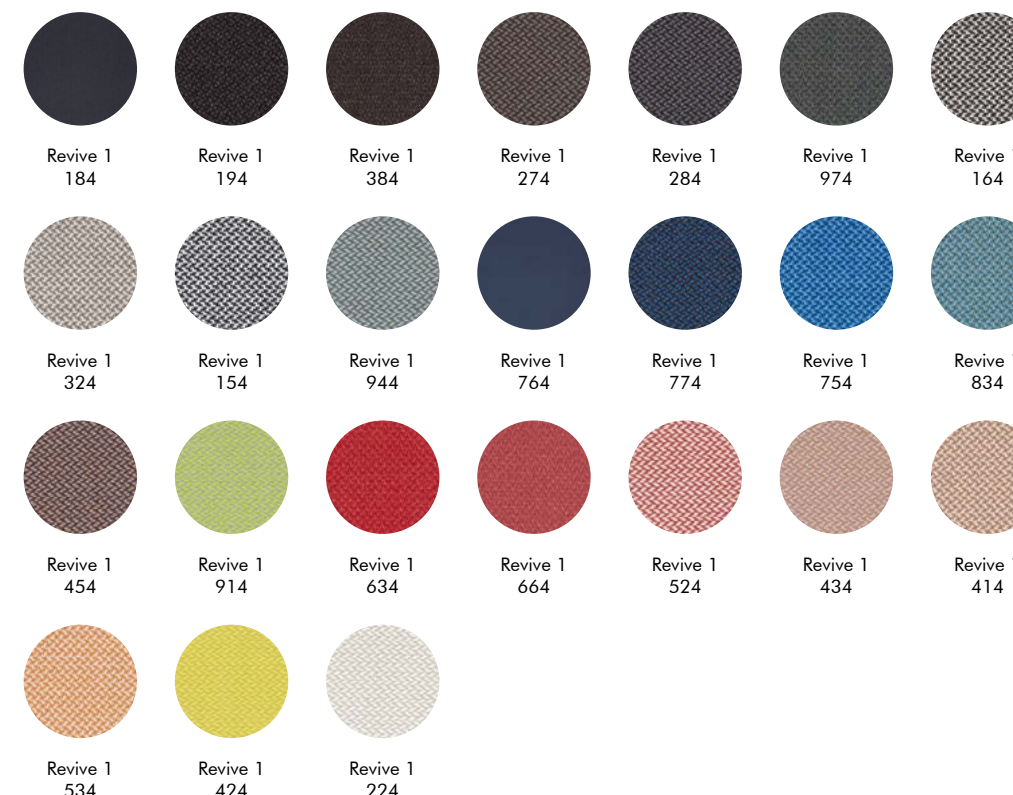

\*Revive 1 contains organophosphorus chemicals used as "covered flame retardant" above a level of 1000ppm. Therefore this fabric can't be used as upholstery cover material in US states that require compliance to California Assembly Bill No. 2998.

**Note** color deviation may occur. Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

# CAT A


FABRIC  
TREVIRA CS+  
TREVIRA CS  
REVIVE 1

## kvadrat




## Clara 2

kvadrat



Clara 2  
144

**Composition** 92% new wool, 8% nylon  
**Weight** 400 g/lin.m  
**Width** 138 cm | 54.33"  
**Abrasion resistance** 80.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2  
 NF D 60 013 | UNI 9175 11M | US Cal. Tech. Bull. 117, Sec. E  
 NFPA 260 | IMO A.652(16)  
**Fastness to light** Note 5-7, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4  
**Pilling** Note 4, EN ISO 12945  
**Maintenance** Vacuuming and dry cleaning

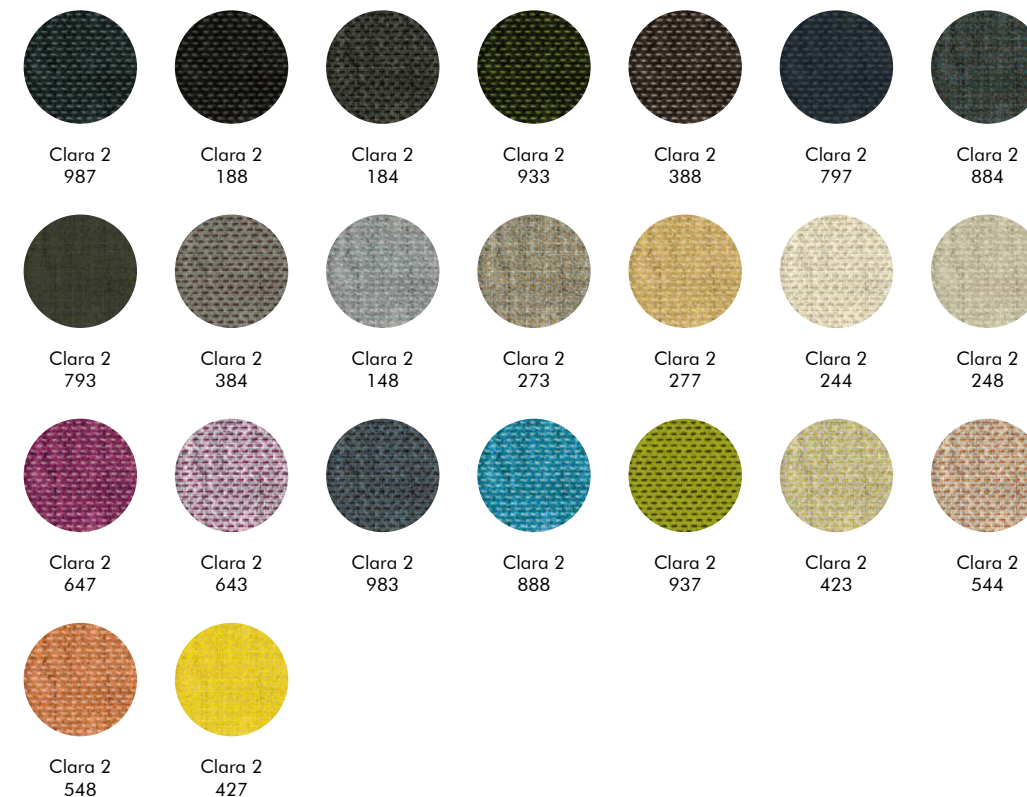

## CAT B

CLARA 2  
REMIX 3  
VELVET

**Note** color deviation may occur.  
 Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

# CAT B

CLARA 2  
REMIX 3  
VELVET

## Remix 3



Remix 3  
113

**Composition** 90% new wool, 10% nylon  
**Weight** 415 g/lin.m  
**Width** 138 cm | 54.33"  
**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | BS 5852 part 1  
 Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM  
 AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013  
 NFPA 260 | IMO FTP Code 2010:Part 8  
**Fastness to light** Note 5-7, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4  
**Pilling** Note 4, EN ISO 12945  
**Maintenance** Vacuuming and dry cleaning



## kvadrat

# CAT B

CLARA 2  
REMIX 3  
VELVET



**Note** color deviation may occur.  
Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

**Note** color deviation may occur.  
Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

# CAT B


CLARA 2  
REMIX 3  
VELVET

## Velvet



VE-Gold  
401

**Composition** 100% PES  
**Weight** 375 g/m<sup>2</sup> | 11.06 oz/yd<sup>2</sup>  
**Width** 140 cm | 55.12"  
**Thickness** 0,7mm | 0.0275"  
**Abrasion resistance** >100.000 Martindale  
**Flammability** USA: CAL TB 117  
**Fastness to light** EU: 4-5  
**Fastness to rubbing** EU: Wet 4 | Dry 4-5  
**Pilling** EU: 4-5  
**Match** Weight ±5% | Width ±2%  
**Maintenance** Vacuum clean regularly. Don't wash. Don't remove the Velvet from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.

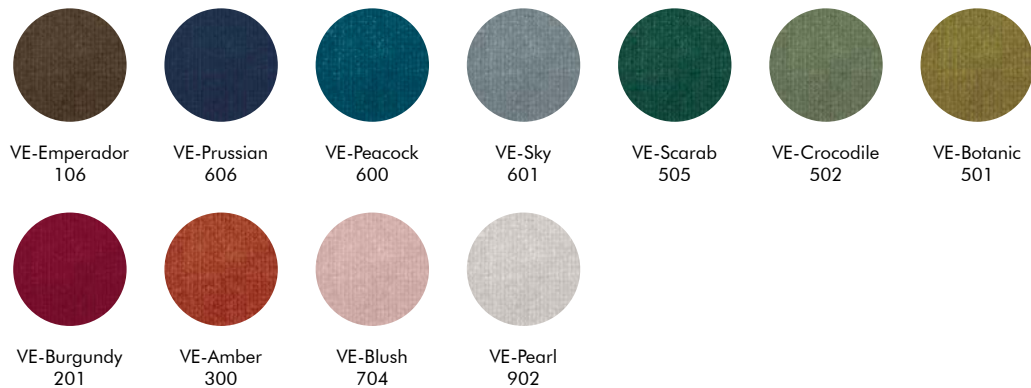


**Note** color deviation may occur.  
 Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

# CAT C


HERO

## Hero



Hero  
101

**Composition** 96% new wool, 4% nylon  
**Weight** 580 g/lin.m  
**Width** 140 cm | 55.11"  
**Abrasion resistance** 45.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | DIN 4102 B2 | NF D 60 013  
 UNI 9175 11M | US Cal. Bull. 117-2013 | NFPA 260  
 IMO A.652 (16)  
**Fastness to light** Note 5-6, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4-5  
**Pilling** Note 3-4, EN ISO 12945  
**Maintenance** Vacuuming and dry cleaning.  
 Washable at max. 30°C, wool programme. Drip drying.  
 Mount covers in slightly wet condition

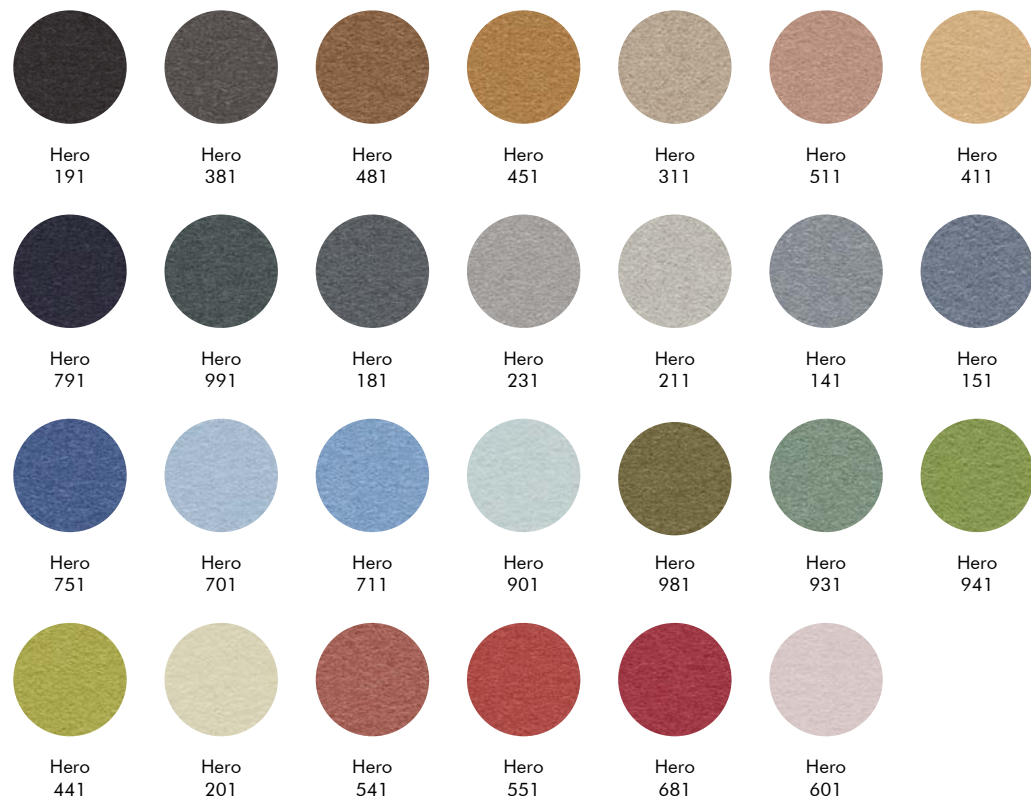

**Note** color deviation may occur.  
 Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)


## kvadrat

## Tonus 4



Tonus 4  
100

**Composition** 90% new wool, 10% Helanca  
**Weight** 665 g/lin.m  
**Width** 140 cm | 55.11"  
**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2  
 Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M  
 US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)  
**Fastness to light** Note 5-7, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 3-5, wet 3-5  
**Pilling** Note 3, EN ISO 12945  
**Maintenance** Vacuuming and dry cleaning

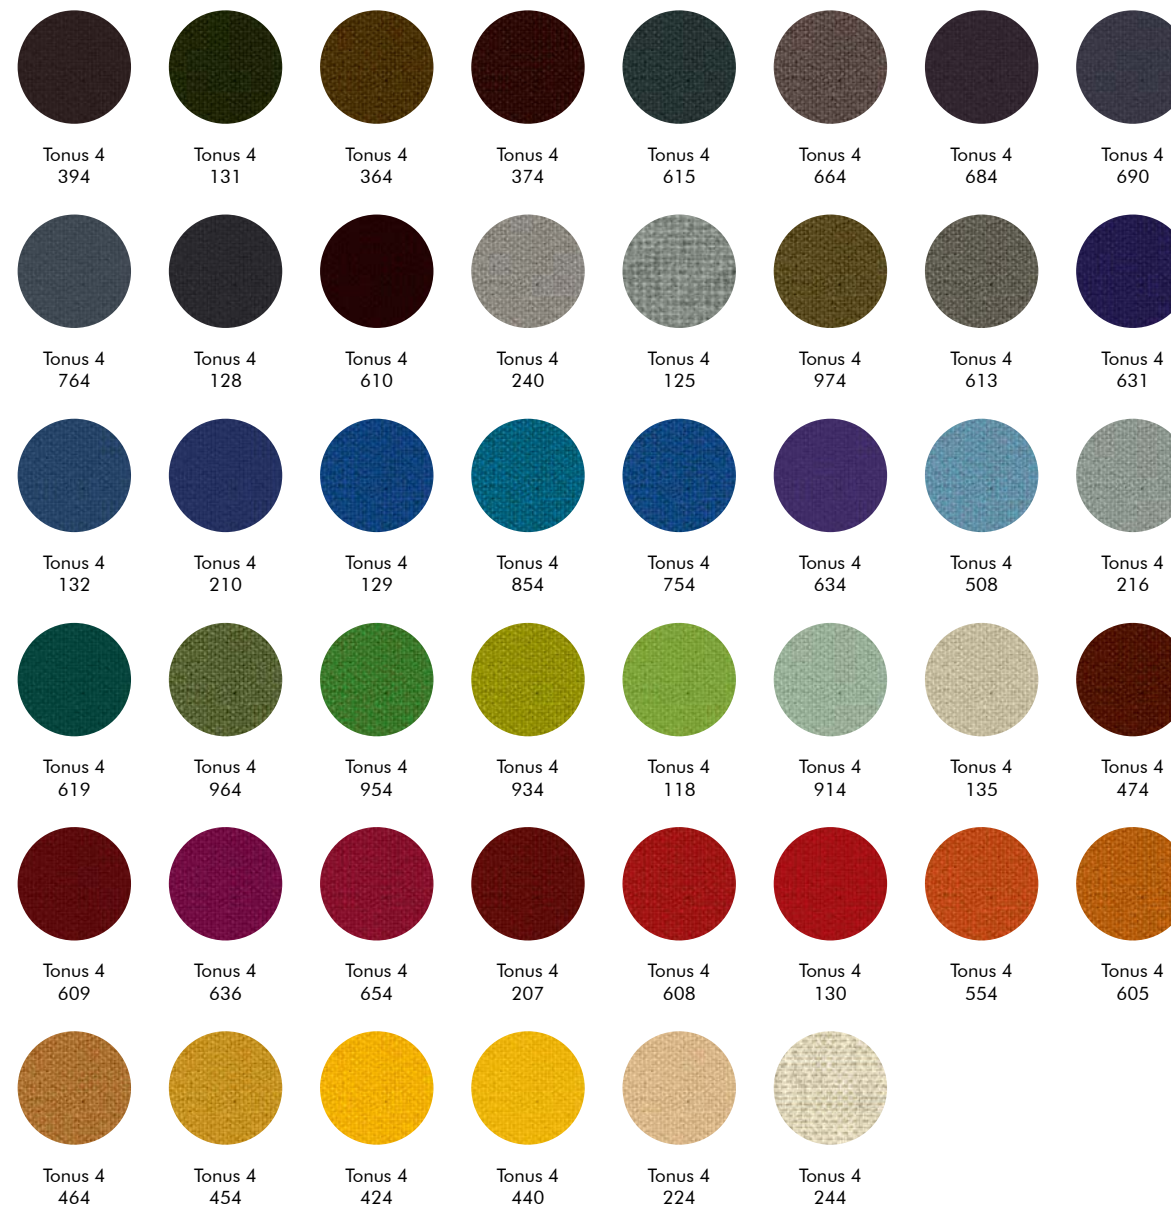

**Note** color deviation may occur.  
 Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

# CAT D


TONUS 4

## kvadrat

# CAT E


MEMORY 2

## Memory 2



Memory 116

**Composition** 100% Trevira CS  
**Weight** 700 g/lin.m  
**Width** 150 cm | 59.05"  
**Abrasion resistance** 35.000 rubs acc. to the Martindale method, EN ISO 12947  
**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1  
 NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M  
 UNI 9177 classe 1 | US Cal. Tech. Bull. 117\*  
 IMO A.652 (16)  
**Fastness to light** Note 5-8, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4-5  
**Pilling** Note 4, EN ISO 12945  
**Maintenance** Vacuuming and dry cleaning.  
 Washable at max. 60°C.  
 Drip drying.

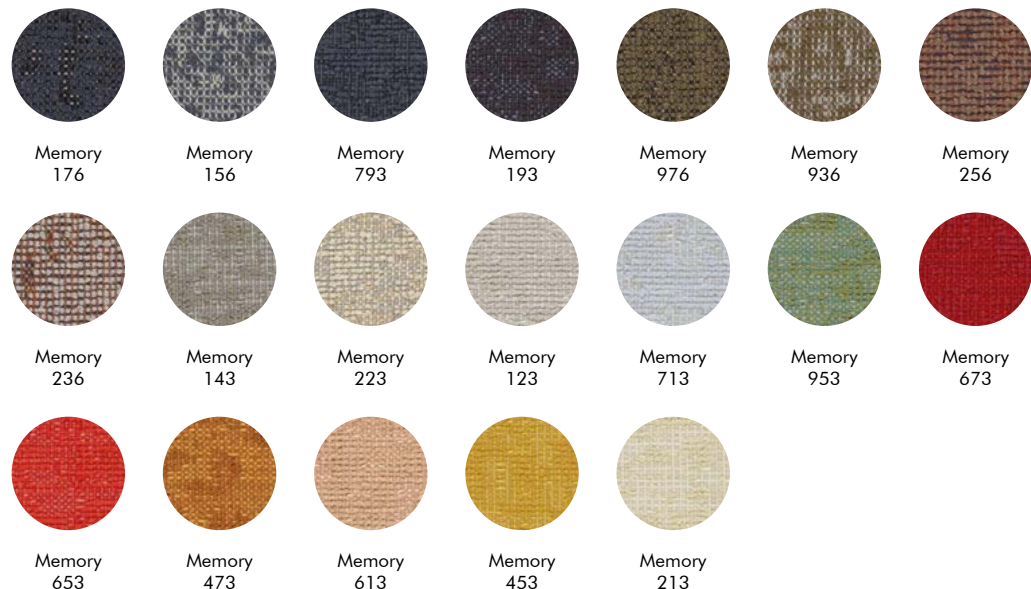

## kvadrat

## Vegetal



VG-Black 98



VG-Cognac 91

**Raw material** Scandinavian Bullhides  
**Thickness** 1,2 - 1,4 mm | 0.047 - 0.055 inch  
**Surface** Pure Aniline  
**Flammability** EU: EN 1021.1 - BS 5852 PART 1 (cigarette)  
 EN 1021.2 - BS 5852 PART 1 (match)  
 USA: CAL TB 117  
**Fastness to light** EU: 3 Blue Scale (72h exposition)  
**Fastness to rubbing** EU: Wet: 20 cycles/3 | Dry: 50 cycles/3  
 Sweat: 20 cycles/3  
**Strength** Tear resistance: >20N or 10N/mm thickness  
 Tensile: >20N/mmq  
 Elongation: 40-70%  
**Match** Normal life markings (scars, wrinkles, scratches) certify the authenticity of the leather. Dust with a soft cloth regularly. Don't expose to direct sunlight. Be careful with sharp objects. Spills should be blotted with a soft absorbent cloth. Don't rub. Never use detergents, shoe polish, alkalized products.

# LEATHER

VEGETAL

\* Memory 2 contains organophosphorus chemicals used as "covered flame retardant" above a level of 1000ppm. Therefore this fabric can't be used as upholstery cover material in US states that require compliance to California Assembly Bill No. 2998.

**Note** color deviation may occur. Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)

**Note** color deviation may occur. Find the latest update of the material specifications and colors on our website: [www.buzzi.space](http://www.buzzi.space)